



APPLICATIONS & SPECIFICATIONS

APPLICATIONS

- Throw-Down convenience
- Tough enclosure
- Dual Fiber Links with Status LEDs
- Extended Range Fiber Optics


SPECIFICATIONS

- Video Input 3G/HD/HD-SDI
- SMPTE 424M, 297M, 292M
- Separate Dual AC inputs
- Input Loopout TX, Dual Outputs RX Genlock - NTSC-PAL, Tri-level
- POE Option
- External DC backup battery (Optional)
- Rain cover for outdoor usage

DFT-TOTE V32

Custom DFT Fiber Series Transport

The JFS DFT-TOTE V32 provides transport of up to 32 3G/HD/SD-SDI signals on as few as two fibers. Any pair of channels can be field reconfigured. The V32 can be a Tote or paired with standard 1RU DFT-16.

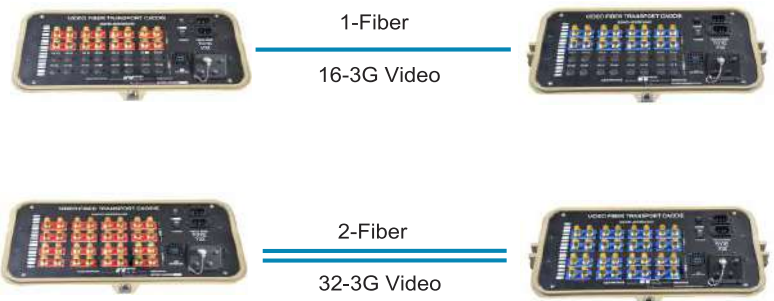

CHICAGO
 Joseph Electronics
 6633 W. Howard Street
 Niles, IL 60714
 847-588-3800

JOSEPH
 ELECTRONICS

JosephElectronics.com | Sales@josephelectronics.com

CALIFORNIA
 Joseph Electronics-West
 3045 Teagarden Street
 San Leandro, CA 94577
 510-352-7500